




PL400/500 is Namis wellproven screw/nut lift designed to create accessibility in public environments and commercial buildings. The lift is intended for passenger and light goods traffic.

- Self supporting shaft
- Platform size can be customized to requirements
- Only 50mm pit
- For inside and outside installation

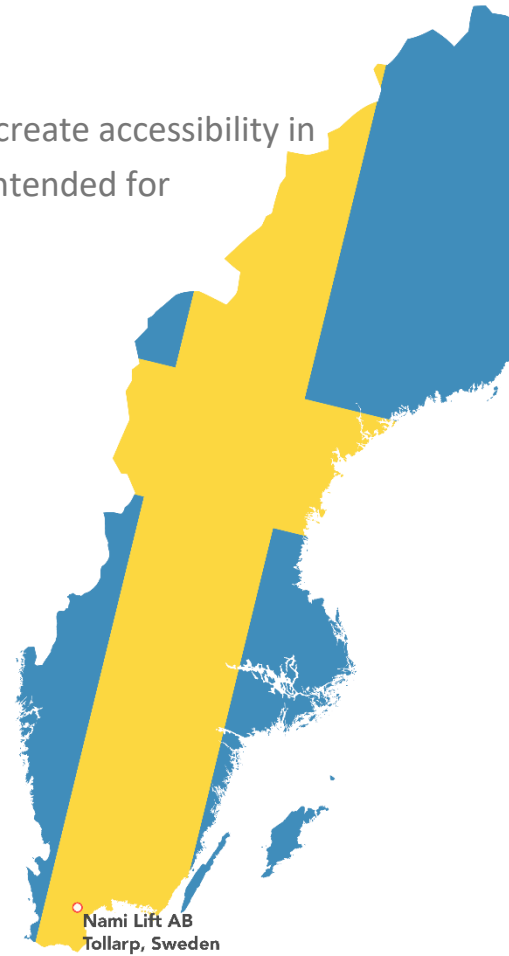

GENERAL

Nami PL400/500 is a screw-driven elevator with a self-supporting shaft. This makes it easy to place as it requires minimal intervention in the building. Completely hidden engine room as standard.

DRIVE

Frequency controlled motor. Screw drive with electrical monitoring on carrier and safety nut

LIFTING CAPACITY

Max load 400kg or 500kg, depending on model.

TRAVEL

0 – 13 meters, up to 7 landings

MAX SPEED

0,15 m/s

PLATFORM SIZE

Standard 1100 x 1400mm / 1100 x 1500mm. Can be customized to requirements. Width min/max: 500/1500mm Length min/max 700/1700mm Max area 1,6m²/2,0m²

SHAFTSIZE

For standard platform size: 1400 x 1440mm / 1400 x 1540mm

PIT / RAMP

50mm

ELECTRIC CONNECTION

1-phase 230V, 16A



DOORS

Clear opening 900 x 2000 mm, glaspanel A3 645 x 1590mm. Can be customized to requirements. Electric doorlock. EI60 doors is also available.

GLAZING

Glaspanels on shaftwalls is available as an option. Possible with glaspanels on three sides.

STANDARD COLOURS



the shaft is made of hot-dip galvanized sheet which is laminated with plastic foil in the desired color. More colors are available, see <https://metalcolour.com/decorative/design-samples/>

EMERGENCY TELEPHONE

SafeLine emergency phone, other options available.

FLOOR

Grey non-slip vinyl mat, other options available on request.

TECHNICAL COMPLIANCE

According to
Machine directive 2006/42/EC
European standard EN 81-41

